


4 Jaw Metric Independent Chucks



- Precision manufactured to fit types A, D, L, and threaded spindles or adaptor mounting
- S.G. iron body
- Sizes 160 to 400mm
- Hardened operating screws
- Solid reversible hard jaws
- Special jaw and jaw way design adding extra bearing surfaces, increases chuck life and rigidity
- Twelve month warranty

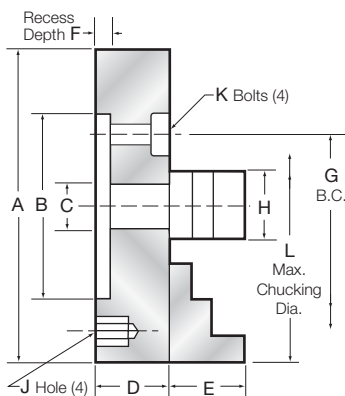

Chuck Size	Model Number	Approx. Weight (kilos)	Maximum rpm
160mm	9500-01701	5.6	3000
200mm	9500-02001	14	2300
250mm	9500-02501	19.5	1700
315mm	9500-03201	32.2	1500
350mm	9500-03501	46	1300
400mm	9500-04101	60	1300

Larger diameter chucks available, contact us for price and delivery.

Dimensional Data for Adapter Mounting Chucks

Chuck Size (A)	B	C	D	E	F	G	H	J	K	L	Gripping Capacity	
											Min.	Max.
160	125	45	54	22	4	140	24	M10	M10	180	8	127
200	125	50	72	32	4	140	32	M10	M10	235	8	178
250	200	60	72	32	5	224	32	M12	M12	305	13	203
315	200	75	80	36	5	224	36	M12	M12	355	13	254
350	260	75	91	37	5	286	36	-	M12	405	19	305
400	260	105	91	37	5	286	36	-	M12	455	19	356